


# Product Datasheet

## EXP-63G EXP-63GS

### Indoor Unheated Emergency Safety Shower

Floor mounted unheated emergency safety shower with 316L stainless steel eye/face wash attached to handrails with integral floor grating, providing extra support to the casualty in the event of an emergency. The frame also provides a designated area for the safety equipment and avoids the space becoming cluttered. Available with either galvanised mild steel or 316L stainless steel handrails and pipework.

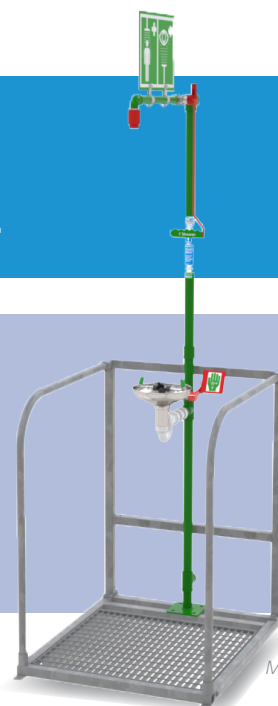

Model shown EXP-63G

## Specifications

### MATERIALS OF CONSTRUCTION

PIPEWORK AND FITTINGS (G)	Galvanised mild steel with 150lb medium wall tubulars and fittings
PIPEWORK AND FITTINGS (GS)	316L stainless steel with 150lb medium wall tubulars and fittings
FRAME (G)	Galvanised mild steel
FRAME (GS)	316L stainless steel
OPERATING VALVES	316L stainless steel
SHOWER SPRAY OUTLET	Machine moulded nylon 6
EYE/FACE WASH BOWL	316L stainless steel
EYE WASH DIFFUSERS	Chrome plated brass with stainless steel mesh
STANDARD FINISH (Galvanised mild steel)	Green powder coated (alternative colours available)
STANDARD FINISH (Stainless steel)	Polished brush finish (paint options available)

### SERVICES

WATER INLET	1 <sup>1</sup> / <sub>4</sub> " Female BSP
DESIGN OPERATING PRESSURE	2.0 to 6 BAR G (29 to 87 PSI) (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
TEST PRESSURE	10.3 BAR G (149 PSI)
MINIMUM FLOW AT OPERATING PRESSURE	Shower: 76 litres/minute minimum (20 US Gallons). Eye/face wash: 12 litres/minute minimum (3 US Gallons)

### ENVIRONMENTAL OPERATING TEMPERATURE

MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F) - (0° C (32° F) if valve is insulated)
MAXIMUM AMBIENT OPERATING TEMPERATURE	45° C (113° F)

### OPERATIONAL

SHOWER SPRAY OPERATION	Hand activated
EYE/FACE WASH OPERATION	Hand activated and/or foot activated

### WEIGHTS and DIMENSIONS

DIMENSIONS - STANDARD ORIENTATION (WxDxH)	840mm (33.1in) x 1080mm (42.5in) x 2300mm (90.6in)
WEIGHT (NO OPTIONS)	105kg (231lbs)

View our Guide to the ANSI/ISEA Z358.1-2014 International Standard for Emergency Eyewash and Shower Equipment at [www.hughes-safety.com](http://www.hughes-safety.com)



# HUGHES




HUGHES-SAFETY.COM

Justrite Safety Group

[www.hughes-safety.com](http://www.hughes-safety.com)

**EXP-63G**  
**EXP-63GS**

*Indoor Unheated Emergency Safety Shower*

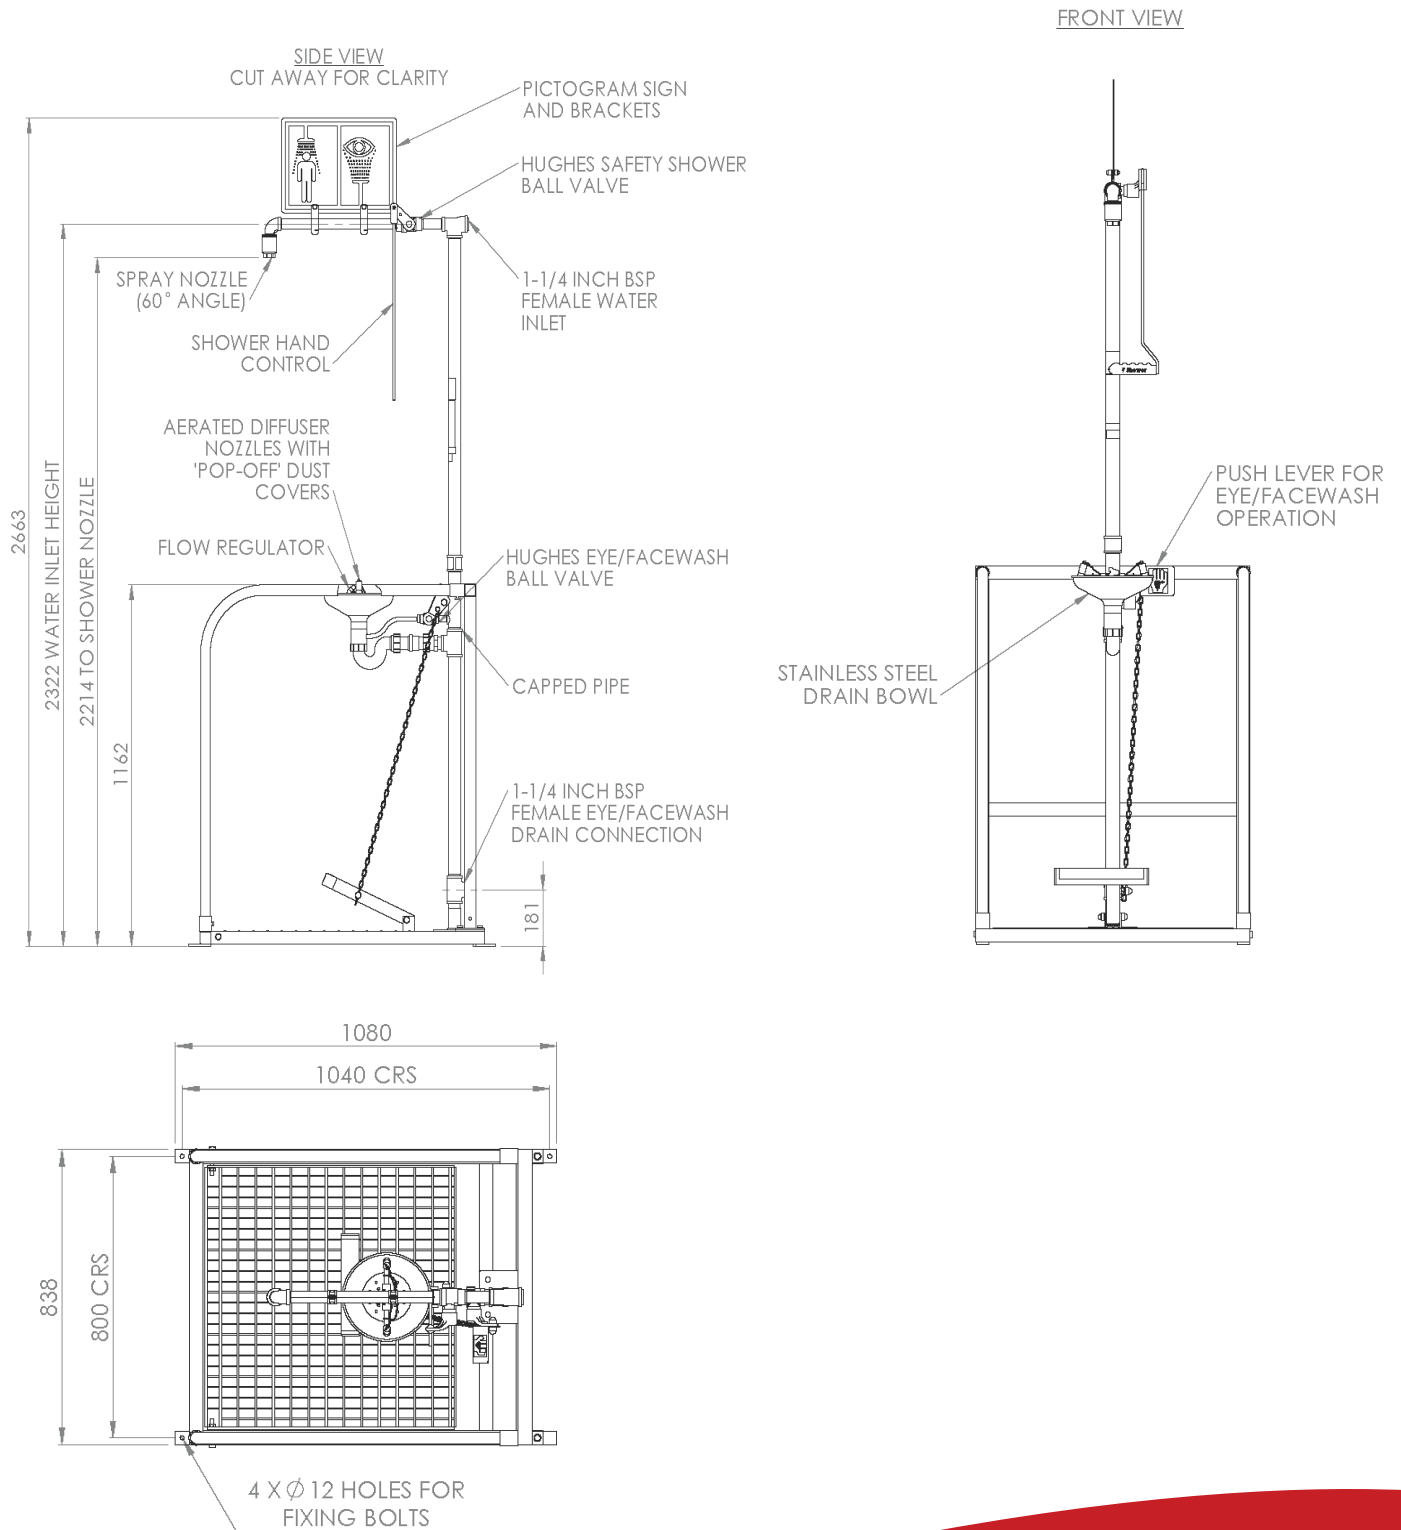

**HUGHES**



**HUGHES-SAFETY.COM**

**Justrite Safety Group**

Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK.

**Email: sales@hughes-safety.com**

**Tel: +44 (0)161 430 6618**

Registered No. 0939240. VAT Registration No. 918 5005 32. Hughes Safety Showers Ltd is a Justrite Group Company.

V1.2